

Identification of DC Motor Parameters using the ZOA Metaheuristic Algorithm with comparative study

Abdelhadi SEBHI¹, Ahmed Chaouki MEGHERBI², Abdelhakim DENDOUGA³ and Athmane ZITOUNI⁴

⁽¹⁾Dept. Electrical Engineering, Laboratory of LI3CUB, University of Biskra, Algeria

⁽²⁾Dept. Electrical Engineering; Laboratory of VSC, University of Biskra, Algeria

Email of corresponding author: abdelhadi.sebhi@univ-biskra.dz

Received: 20 August 2025

Accepted for publication: 17 September 2025

Published: 20 December 2025

Abstract— In this work, the parameters of the direct current motor (DC motor) were estimated using its armature current and speed responses, employing a recent optimization algorithm known as the Zebra Optimization Algorithm (ZOA). ZOA is recognized for its high accuracy and fast convergence, as demonstrated in various recent studies. To evaluate its effectiveness, ZOA was applied to estimate the DC motor parameters and its performance was compared with two well-known algorithms: the Enhanced Opposition-Based Equilibrium Optimizer-Slim Mold Algorithm (EOSMA) and the Grey Wolf Optimizer (GWO). The results show that ZOA outperforms both EOSMA and GWO in minimizing the objective function, which reflects the estimation error of both armature current and speed. These findings confirm the superiority of ZOA in accurately identifying DC motor parameters.

Keywords—DC Motor, Parameter Estimation, Zebra Optimization Algorithm (ZOA), Metaheuristic Algorithms, Grey Wolf Optimizer (GWO).

I. INTRODUCTION

Accurate parameter identification of the DC motor is a fundamental aspect of modern control systems, predictive maintenance, and high-fidelity dynamic modeling. DC motors remain widely used in various industrial applications due to their simplicity, high starting torque, and ease of control. However, achieving optimal performance and reliability requires accurate determination of key motor parameters, including armature resistance, inductance, moment of inertia, and friction coefficients. Traditional identification techniques such as least squares estimation, recursive algorithms, and frequency response analysis have long been employed to address this problem. While effective under certain conditions, these methods often assume system linearity, require accurate mathematical modeling, and are highly sensitive to measurement noise and parameter fluctuations. Furthermore, classical methods tend to converge to local minima, particularly in systems that exhibit nonlinear or time-varying behavior.

Several previous studies have addressed the problem of DC motor parameter estimation using a wide variety of techniques. Among the conventional methods are curve fitting [1], constrained optimization [2], inverse problem methodologies employing conjugate gradient and regularization [3], and regression-based approaches [4]. In particular, the least squares estimation method has been extensively used due to its simplicity and effectiveness in static and linear environments [5]–[11]. In response to the limitations of classical methods, evolutionary algorithms such as Differential Evolution (DE) have been proposed as promising alternatives for nonlinear and complex systems [12], [13]. Moreover, heuristic and metaheuristic techniques have attracted increasing attention due to their robustness and ability to avoid local optima. These methods include particle swarm optimization (PSO) [14], [15], ant colony optimization (ACO), artificial bee colony (ABC) algorithms [16], as well as other nature-inspired approaches such as whale optimization and bat algorithms [17], [18]. Among these, the Cuckoo Search (CS)

algorithm has been particularly effective in estimating electrical and mechanical parameters of DC motors [19], [20]. Recent trends have further embraced intelligent algorithms and machine learning-based approaches, including parallel processing for real-time estimation [21] and adaptive learning methods aimed at reducing system uncertainties and accelerating the training process of neural networks [22]. Finally, several analytical approaches remain in use for parameter estimation, such as the motor transfer function method [23], the moment method [24], and algebraic techniques that estimate friction and inertia using voltage and angular position data from DC servo motors [25]. Other analytical models transform differential equations into algebraic forms through discrete-time sampling, enabling the identification of continuous-time parameters [26]. Furthermore, parameter estimation has also been integrated with controller design, such as PI controller optimization in digital DC motor applications [27]. In addition, hybrid metaheuristic algorithms, such as the Equilibrium Slime Mould, have been explored for parameter identification in induction motors. These algorithms combine the strengths of different search strategies to optimize performance in complex systems, providing a promising solution for efficient motor parameter estimation [28]. One of the core contributions of this study lies in the introduction and application of the ZOA to the parameter identification problem in DC motor. Through a structured comparative framework, the performance of ZOA was evaluated alongside the EOSMA and the GWO. with the following key performance metrics: estimation accuracy, convergence speed, and robustness to initial condition variations. ZOA's superior exploration exploitation balance and adaptive behavior allow it to effectively navigate complex, non-convex optimization landscapes typically encountered in electrical machine modeling. These findings highlight the potential of ZOA as a powerful and reliable alternative to more established metaheuristic algorithms for nonlinear system identification.

The remainder of this paper is organized as follows: Section 2 presents the DC motor modeling. Sections 3, 4, and 5 respectively describe the EOSMA, GWO, and ZOA algorithms. Section 6 details the DC motor parameter estimation using these methods. Finally, Section 7 discusses the results and compares the performance of ZOA with GWO and EOSMA.

DC Motor Modeling

DC motors, while no longer prevalent in electricity generation due to the advancement of semi-conductor rectifiers, remain extensively used in various applications such as automotive systems (including fans and power windows), household appliances, and portable electric tools often as universal motors. One of the key advantages of the DC motor is the simplicity of their mathematical modeling, which makes them highly suitable for analysis and control system design. To streamline the modeling process, several assumptions are typically adopted: temperature effects on resistance and inductance are neglected; iron losses and the influence of armature reaction are disregarded; all windings armature, compensating, and auxiliary are represented by equivalent resistance and

inductance; and magnetic saturation is considered only in the stator yoke.

In this model, a preset DC motor with a rated power of 5 HP, a rated armature voltage of 240 V, a nominal speed of 1750 RPM, and a nominal current of approximately 17 A is used. The field voltage is specified as 150 V.

A. Electrical Model

The armature is represented by a resistor R_a , an inductor L_a , and a back electromotive force $E(t)$ connected in series. The voltage applied to the motor is expressed as follows:

$$u_a(t) = E(t) + R_a i_a(t) + \frac{L_a di_a(t)}{dt} \quad (1)$$

The back electromotive force (EMF) is proportional to the angular velocity:

$$E(t) = k' \cdot \Omega(t) \quad (2)$$

Where

$u_a(t)$ is the armature voltage, $i_a(t)$ is the armature current, $\Omega(t)$ is the angular speed and k' is the motor constant.

B. Mechanical Model

The electromagnetic torque generated by the motor is:

$$T_{em(t)} = k' \cdot I_a(t) \quad (3)$$

The rotational dynamics are governed by:

$$j \cdot \frac{d\Omega(t)}{dt} + f \cdot \Omega(t) = T_{em(t)} - T_{R(t)} \quad (4)$$

Where: j is the moment of inertia, f is the viscous friction coefficient, $T_{R(t)}$ is the load torque.

II. EQUILIBRIUM OPTIMIZER SLIME MOULD ALGORITHM.

EOSMA is a hybrid metaheuristic algorithm that combines the strengths of the Slime Mould Algorithm (SMA) and the Equilibrium Optimizer (EO). It is designed to balance exploration (global search) and exploitation (local search), thereby achieving fast convergence and high solution accuracy when addressing complex optimization problems [29].

A. A Main Update Equation.

At each iteration, the position of each solution, $\overrightarrow{x_{(i+1)}}$ is updated using one of the following three equation, based on random values:

$$\overrightarrow{x_{(i+1)}} = \begin{cases} \overrightarrow{x_{eq}(i)} + (\overrightarrow{x(i)} - \overrightarrow{x_{eq}(i)}) \cdot \vec{F} + \vec{j} \cdot \frac{(1-\vec{F})}{\vec{r}_v}, & rand < z \\ \overrightarrow{x_{eq,1}(i)} + \vec{v} \vec{a} \cdot (\vec{w} \cdot \overrightarrow{x_f(i)} - \overrightarrow{x_j}), & r < q \\ \overrightarrow{x(i)} + \vec{v} \vec{b} \cdot \overrightarrow{x(i)} & r \geq q \end{cases} \quad (5)$$

Where:

$\vec{x}_{(i+1)}$: Current solution position, $\vec{x}_{eq(i)}$: Random solution from the equilibrium pool, $\vec{x}_{eq,1(i)}$: Best solution in the equilibrium pool, $\vec{F}$: Equilibrium factor from EO, $\vec{r}$: Random vector $\in [0,1]$, $\vec{j}$: Density-related factor from EO, $\vec{x}_{(i)}$: Randomly selected slime mould positions, va : Adaptive coefficient, W : Weight factor from SMA, vb : Linearly decreasing value from 1 to 0, z : Experimental threshold (typically 0.03–0.06), q : Selection threshold based on fitness, $rand$: is a random number vector in the range [0,1],

B. Equilibrium Factor $\vec{F}$ Calculation (from EO):

$$\vec{F} = A_1 \cdot \text{sign}(\vec{r} - 0.5) \cdot (e^{-\vec{r}T_1} - 1) \quad (6)$$

$$T_1 = \left(1 - \frac{i}{\max_i}\right)^{(A_2 \cdot i / \max_i)} \quad (7)$$

Where:

$A_1, A_2 \in [1,2]$: Control the balance between exploration and exploitation, i : Current iteration, $\max_i$: Maximum number of iterations, r : is probability numbers in [0,1], T_1 : is a time-dependent control parameter used to regulate the balance between exploration and exploitation during the optimization process..

C. Boundary Handling Equation.

To ensure that updated solutions remain within search limits:

$$\vec{x}_{a,y(i+1)} = \begin{cases} \frac{(x_{a,y(i)} + UB)}{2} \vec{x}_{a,y(i+1)} > UB \\ \frac{(x_{a,y(i)} + UB)}{2} \vec{x}_{a,y(i+1)} < UB \\ \vec{x}_{a,y(i+1)} & \text{others} \end{cases} \quad (8)$$

UB : It symbolizes the upper limits, a denotes the population size, and y represents the number of dimensions.

IV. RGREY WOLF OPTIMIZER

The Grey Wolf Optimizer (GWO) is a nature-inspired metaheuristic algorithm that mimics the leadership hierarchy and cooperative hunting behavior of grey wolves (*Canis lupus*). In this algorithm, the population is divided into four hierarchical levels: alpha (α), representing the leader and best solution; beta (β), acting as the advisor; delta (δ), which plays supporting roles such as scouts and guards; and omega (ω), representing the lowest-ranking individuals.

The hunting mechanism of grey wolves is modeled through three main phases: tracking the prey, encircling it, and finally attacking it. In GWO, this process is mathematically modeled to update the positions of the wolves based on the top three solutions (α, β, δ), while the remaining wolves (ω) follow them. Each wolf updates its position according to the following formula [30]:

$$\vec{X}_{(k+1)} = \vec{X}_p(k) - \vec{A} \cdot \vec{D} \quad (9)$$

Encircling prey: For a given iteration k , a prey located at $\vec{X}_p(k)$ is encircled by the grey wolves, which update their individual position $\vec{X}_{(k)}$ as follow:

$$\vec{D} = |\vec{C} \cdot \vec{X}_p(k) - \vec{X}_{(k)}| \quad (11)$$

Control parameters:

$$\vec{A} = 2\vec{a} \cdot r_1 - \vec{a}, \quad \vec{C} = 2 \cdot r_2 \quad (12)$$

where:

Where a decreases linearly from 2 to 0, and $r_1, r_2 \in [0,1]$ are random numbers.

A. Guidance from Alpha, Beta, Delta.

α = best solution, β = 2nd best solution, δ = 3rd best solution. Wolves update positions relative to the three best solutions:

$$\begin{aligned} \vec{X}_1 &= \vec{x}_\alpha - \vec{A}_1 \cdot D_\alpha \\ \vec{X}_2 &= \vec{x}_\beta - \vec{A}_2 \cdot D_\beta \\ \vec{X}_3 &= \vec{x}_\delta - \vec{A}_3 \cdot D_\delta \end{aligned} \quad (13)$$

$\vec{x}_\alpha, \vec{x}_\beta$ and $\vec{x}_\delta$ are the position calculations of the alpha, beta, and delta wolves, and $\vec{A}_1, \vec{A}_2$ and $\vec{A}_3$ are the variables obtained using the equation, while D_α, D_β and D_δ are defined as follows:

$$\begin{aligned} \vec{D}_\alpha &= |\vec{C}_1 \cdot \vec{X}_\alpha - \vec{X}| \\ \vec{D}_\beta &= |\vec{C}_2 \cdot \vec{X}_\beta - \vec{X}| \\ \vec{D}_\delta &= |\vec{C}_3 \cdot \vec{X}_\delta - \vec{X}| \end{aligned} \quad (14)$$

B. Final Position Update

The new position is the average of the three leaders:

$$\vec{X}_{(k+1)} = \frac{\vec{X}_1 + \vec{X}_2 + \vec{X}_3}{3} \quad (15)$$

V. ZEBRA OPTIMIZATION ALGORITHM

The Zebra Optimization Algorithm (ZOA) is a nature-inspired, population-based metaheuristic introduced by Trojovská et al. in 2022. It emulates the foraging behavior and anti-predatory defense strategies of zebras to perform optimization, where candidate solutions (zebras) are iteratively updated through two distinct behavioral phases (1, 2).

A. Phase 1: Foraging Behavior.

In this phase, the best solution in the population known as the pioneer zebra guides other zebras (solutions) toward its position. The update rule is:

$$x_{i,j}^{new,p1} = x_{i,j} + r \cdot (PZ_j - I \cdot x_{i,j}) \quad (16)$$

Then, the position is accepted only if it improves the objective:

$$X_i = \begin{cases} X_i^{new,p1}, & F_i^{new,p1} < F_i \\ X_i, & otherwise \end{cases} \quad (17)$$

Where:

$x_{i,j}$ is the current solution's coordinate, PZ_j is the pioneer zebra's component, $r \in [0,1]$ is a random number, $I = round(1 + rand) \in \{1,2\}$, F_i represents the objective function value before updating, Here, $x_{i,j}^{new,p1}$ denotes the updated coordinate of the solution in dimension generated during the foraging phase (phase 1).

B. Phase 2: Predator Defense Behavior

Here, zebras react to threats either by escaping predators or forming a defensive group. Based on a probability P_s :

$$x_{i,j}^{new,p2} = \begin{cases} x_{i,j} + R \cdot (2r - 1) \cdot \left(1 - \frac{t}{T}\right) \cdot x_{i,j}, & P_s \leq 0.5 \quad (S_1) \\ x_{i,j} + r \cdot (AZ_j - I \cdot x_{i,j}), & P_s > 0.5 \quad (S_2) \end{cases} \quad (18)$$

And update acceptance:

$$X_i = \begin{cases} X_i^{new,p2}, & F_i^{new,p2} < F_i \\ X_i, & otherwise \end{cases} \quad (19)$$

Where: $R = 0.001$ (a constant), t is the current iteration, T is the maximum number of iterations, AZ_j is the coordinate of the attacked zebra, P_s decides the strategy (escape vs. attack confusion), $x_{i,j}^{new,p2}$ is the updated coordinate of the solution in dimension generated during the predator-defense phase (phase 2).

These two phases repeat each iteration, allowing the algorithm to adaptively balance exploration and exploitation. At the end of optimization, the position of the pioneer zebra (best solution) is returned as the optimal result [31].

VI. IDENTIFICATION OF ELECTRICAL PARAMETERS USING THE ZOA ALGORITHM

Figure 1 illustrates the principle of applying ZOA for identifying the electrical parameters of the DC motor. The actual armature current I_a and angular speed Ω are measured from the real DC motor, while the estimated values $I_{a\ est}$ and Ω_{est} are obtained from the DC motor model. The difference between the measured and estimated values is used to compute the objective function.

The ZOA algorithm then adjusts the parameters of the DC motor model in order to minimize this objective function. This iterative process continues until the error is sufficiently reduced, ensuring that the model accurately reproduces the behavior of the real machine. We now proceed to the identification of the DC motor parameters, represented by the set of differential equations defined in:

$$\dot{x}_{est} = H(p_{est}, x_{est}, u) \quad (20)$$

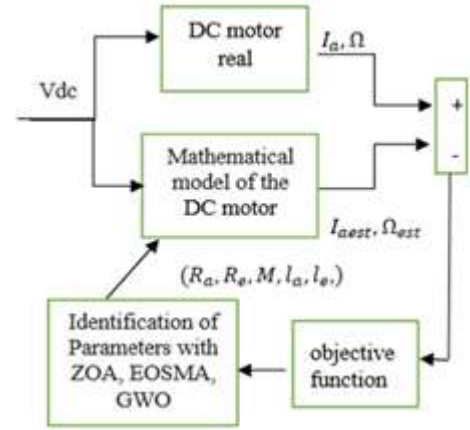


Fig. 1. Illustration of the ZOA, EOSMA and GWO algorithms applied to identify the electrical parameters of the DC motor.

Where x_{est} is the variable vector of the mathematical model of the DC motor. H function represents a mathematical model of the DC motor. p_{est} represents the identification of the parameters of the DC motor.

$$p_{est} = [R_a, R_e, M, l_a, l_e]^t \quad (21)$$

$$x_{est} = [I_{a\ est}, \Omega_{est}]^t \quad (22)$$

Where l_a the armature Inductance, R_a is the armature Resistance, l_e is the field Inductance, R_e is the field Resistant, M is the mutual Inductance.

The optimal parameter vector $\widehat{p}_{est}$ can be identified based on the following equations:

$$F(\widehat{p}_{est}) = \min H(p_{est}), \quad p_{est} \in R^n \quad (23)$$

$$F(\widehat{p}_{est}) = C_1(I_a - I_{a\ est})^2 + C_2(\Omega - \Omega_{est})^2$$

C_1, C_2 are the weights that determine how much the current error and speed error matter in the objective.

$F(\widehat{p}_{est})$: represents the objective function.

Table 1 summarizes the main parameter settings used for the ZOA, GWO, and EOSMA algorithms. To ensure a fair comparison, the population size and number of iterations were kept identical for all three algorithms, set to 200 and 50, respectively. Each algorithm also includes specific parameters related to its structure: for ZOA, the parameter RRR was set to 0.01, as recommended in the original study. For the hybrid algorithm, a parameter zzz was introduced and empirically

tuned, with the optimal value determined as $z=0.03z = 0.03z=0.03$ based on validation performance [28].

TABLE I. PARAMETERS OF ALGORITHMS

Parameters	Algorithms		
	ZOA	GWO	EOSMA
Number of populations	200	200	200
Number of iterations	50	50	50
Z	/	/	0.03
R	0.01	/	/

Table 2.shows the search space boundaries for the parameters optimized by the ZOA, GWO, and EOSMA algorithms. These boundaries were defined for each parameter to guide the optimization process effectively and ensure meaningful results. The selected ranges are based on typical characteristics and design specifications of the DC motor.

TABLE II. THE RESEARCH SPACE OF OPTIMIZED PARAMETERS BY THE ZOA, GWO AND EOSMA ALGORITHM

	$R_a(\Omega)$	$R_e(\Omega)$	$L_a(H)$	$M(H)$	$L_e(H)$
<i>lb</i>	0	100	0.01	1	80
<i>ub</i>	3	200	0.1	3	150

lb it symbolizes the lower limits, *ub* it symbolizes the upper limits,

VII. RESULTS AND DISCUSSION

Table 3 presents the estimated parameters of the DC motor using three optimization algorithms: GWO, EOSMA, and ZOA. The parameters include the armature inductance L_a , external inductance L_e , mutual inductance M , armature resistance R_a , and external resistance R_e . The results indicate that while all three algorithms produce similar values for L_a and R_a , differences are noticeable in other parameters, particularly L_e , M , and R_e . Among the tested methods, the ZOA algorithm achieves the best accuracy in parameter estimation. This conclusion is supported by the objective function value, which reflects the optimization error. ZOA achieves an objective function value of 10^{-5} , significantly outperforming EOSMA (0.015) and GWO (0.0647). This demonstrates that ZOA is the most effective algorithm for accurately identifying the DC motor parameters.

Figure 2 illustrates the evolution of the objective function over successive iterations for the ZOA, EOSMA, and GWO algorithms. The results clearly show that the ZOA algorithm achieves the fastest convergence, reaching a stable solution at approximately the 5th iteration. In comparison, the EOSMA algorithm converges around the 15th iteration, while the GWO algorithm requires up to 25 iterations to reach a similar convergence level.

TABLE III. OPTIMIZED PARAMETERS OF THE MCC USING GWO, EOSMA AND ZOA ALGORITHM

Parameters	Algorithms			real
	GWO	EOSMA	ZOA	
$L_a(H)$	0.016	0.016	0.016	0.016
$L_e(H)$	113.27	110.07	112.5008	112.5
$M(H)$	1.1806	1.228	1.2362	1.234
$R_a(\Omega)$	0.78	0.78	0.78	0.78
$R_e(\Omega)$	150.26	149.33	149.999	150
Objective function	0.0647	0.015	10^{-5}	/

This performance highlights the clear superiority of the ZOA algorithm in terms of both convergence speed and solution quality. ZOA consistently attains lower objective function values more rapidly than its counterparts, making it particularly suitable for time-sensitive optimization tasks that demand high accuracy. Although ZOA may exhibit slightly higher computational demands, its ability to deliver high-quality solutions in fewer iterations underlines its robustness and efficiency. Consequently, it presents itself as a highly effective optimization technique, especially in applications where rapid convergence and precise outcomes are critical.

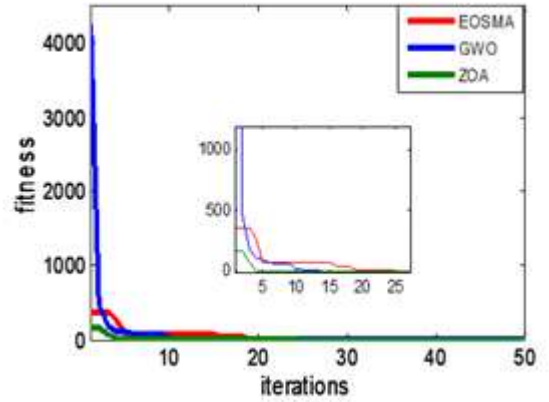


Fig. 2. Objective function.

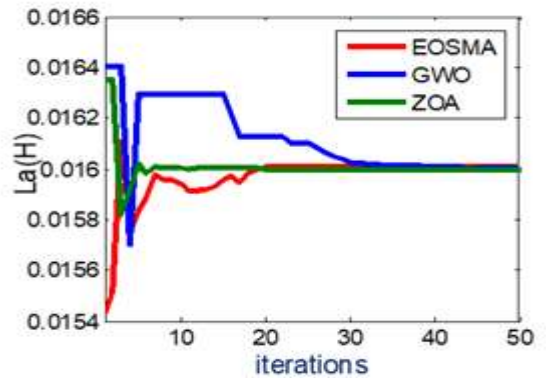


Fig. 3. Armature Inductance

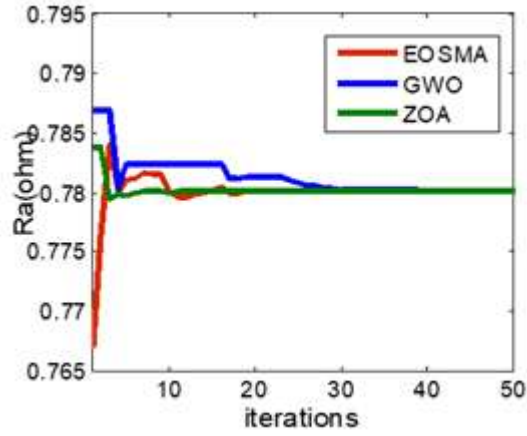


Fig. 4. Armature Resistance.

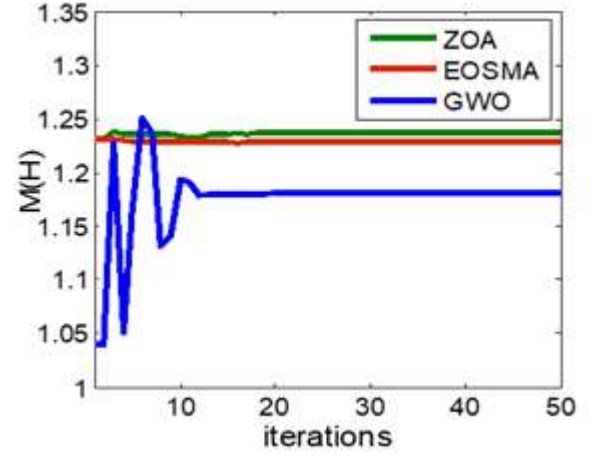


Fig. 7. Mutual Inductance

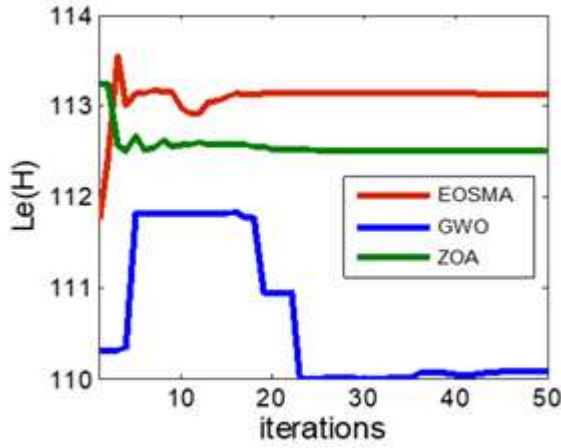


Fig. 5. Field Inductance.

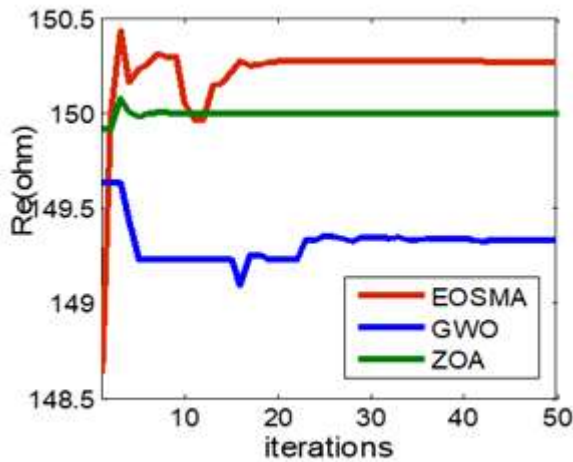


Fig. 6. Field Resistant

Fig. 3–7 illustrate the variation of the DC motor parameters over the course of the optimization iteration. The ZOA, EOSMA, and GWO algorithms perform the parameter search within the solution space defined in Table 2. Initially, each algorithm starts with randomly generated parameter values, resulting in high error rates at the beginning of the optimization process. As iterations progress, the ZOA algorithm shows early convergence, with its parameters stabilizing around optimal values by the 5th iteration. EOSMA begins to converge after approximately 15 iterations, while GWO demonstrates a slower convergence rate, requiring nearly 25 iterations to approach acceptable results. Upon completion of the optimization process, it is evident that the ZOA algorithm outperforms both EOSMA and GWO in terms of accuracy, convergence speed, and final solution quality. This superior performance is attributed to the effective minimization of its objective function, which reached a value of zero in the case of ZOA.

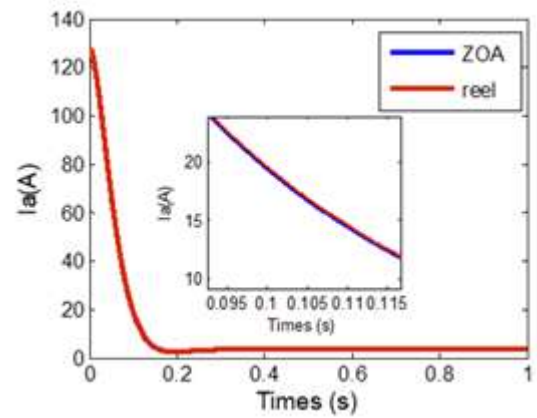


Fig. 8. Comparison of DC motor Armature Current: Simulation (ZOA) vs Real System with Identified Parameters.

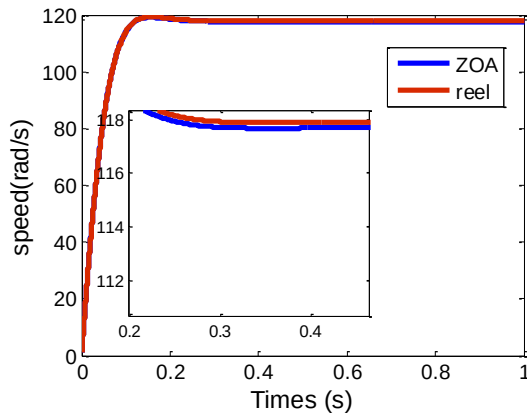


Fig. 9. Comparison of DC motor Speed Response: Simulation(ZOA) vs Real System with Identified Parameters.

Figures 8 and 9 present a comparison between the simulation results obtained using the ZOA-based model and the experimentally measured data of the DC motor, in terms of speed and armature current responses. A strong agreement is observed between the simulated and measured signals, which confirms the accuracy of the identified parameters and the effectiveness of the ZOA approach in capturing the actual dynamic behavior of the motor. These results demonstrate the reliability of the proposed model in predicting motor performance under identical operating conditions.

VIII. CONCLUSION

In this work, the DC motor parameters were successfully identified using the ZOA, based on measured armature current and speed responses. The proposed approach was assessed by comparing its performance with two other metaheuristic algorithms, namely EOSMA and GWO. The obtained results clearly show that ZOA achieves higher accuracy and faster convergence, with reduced error values in both current and speed estimation. These findings emphasize the effectiveness of ZOA as a reliable and efficient method for parameter identification in electric motor systems. Future work may investigate the application of ZOA to more complex systems or under variable load conditions..

REFERENCES

- [1] W. Wu, "DC Motor Parameter Identification Using Speed Step Responses," *Modelling and Simulation in Engineering*, vol. 2012, Article ID189757, published: 03 October 2012, doi.org/10.1155/2012/189757
- [2] S. Adewusi, "Modeling and Parameter Identification of a DC Motor Using Constraint Optimization Technique," *Journal of Mechanical and Civil Engineering(IOSR-JMCE)*, Volume 13, Issue 6 Ver. II (Nov. - Dec. 2016), PP 46-56DOI: 10.9790/1684-1306024656.
- [3] M. Hadeef and M. R. Mekideche, "Inverse Problem Methodology for Parameter Identification of a Separately Excited DC Motor," *Journal of Electrical Engineering & Technology*, vol. 4, no. 3, pp. 365–369, 2009.
- [4] M. Khodapanah, A. F. Zobaa, and M. Abbod, "Estimating power factor of induction motors using regression technique," *Proc. 17th Int. Conf. Harmonics and Quality of Power (ICHQP)*, Belo Horizonte, Brazil, 2016, pp. 502–507. doi: 10.1109/ICHQP.2016.7783334.
- [5] R. Krneta, S. Antić, and D. Stojanović, "Recursive Least Squares Method in Parameters Identification of DC Motors Models," *Facta Universitatis, Series: Electronics and Energetics*, vol. 18, no. 3, pp. 467–478, Dec. 2005.
- [6] M. Abedinifar and S. Ertugrul, "Comparative Study of Identification Using Nonlinear Least Squares Errors and Particle Swarm Optimization Algorithms for a Nonlinear DC Motor Model," *Proceedings of the INFUS 2021 Conference*, held August 24–26, 2021. Volume 1, pp 554–561. In Book : " Intelligent and Fuzzy Techniques for Emerging Conditions and Digital Transformation", Edited by: C. Kahraman, S. Cebi, S. Cevik Onar, B. Oztaysi, A. C. Tolga, and I. U. Sari, Eds., Series: Lecture Notes in Networks and Systems, ISBN 978-3-030-85625-0 ISBN 978-3-030-85626-7 (eBook), Springer Nature Switzerland AG 2022, Gewerbestrasse 11, 6330 Cham, Switzerland
- [7] Y. Koubaa, "Application of least-squares techniques for induction motor parameters estimation," *Mathematical and Computer Modelling of Dynamical Systems*, vol. 12, no. 4, pp. 363–375, 2006. doi: 10.1080/13873950500064103.
- [8] D. V. Ivanov, I. L. Sandler, N. V. Chertykovtseva, D. I. Mitroshin, O. S. Ivanova, and A. A. Kormakov, "Identification of Parameters of DC Motor of Independent Excitation by Noisy Data," *Proc. 3rd Int. Conf. Control Systems, Mathematical Modeling, Automation and Energy Efficiency (SUMMA)*, Lipetsk, Russia, 2021, pp. 194–198. doi: 10.1109/SUMMA53307.2021.9632146.
- [9] S. Arshad, S. Qamar, T. Jabbar, and A. Malik, "Parameter estimation of a DC motor using ordinary least squares and recursive least squares algorithms," *Proc. 8th Int. Conf. Frontiers of Information Technology (FIT)*, 2010, Article no. 31, pp. 1–5. doi: 10.1145/1943628.1943659.
- [10] H. S. H. Wee and N. S. Ahmad, "Review and Comparative Analysis of System Identification Methods for Perturbed Motorized Systems," *Computer Modeling in Engineering & Sciences*, vol. 143, no. 2, pp. 1301–1354, May 2025. doi: 10.32604/cmescs.2025.063611.
- [11] H. Ohlsson, *Regularization for Sparseness and Smoothness Applications in System Identification and Signal Processing*, Ph.D. dissertation, Linköping Univ., Linköping, Sweden, 2010. ProQuest Dissertations & Theses, No. 31250331.
- [12] M. G. Villarreal-Cervantes, A. Rodríguez-Molina, C.-V. García-Mendoza, O. Peñaloza-Mejía, and G. Sepúlveda-Cervantes, "Multi-Objective On-Line Optimization Approach for the DC Motor Controller Tuning Using Differential Evolution," *IEEE Access*, vol. 5, pp. 20393–20407, 2017. doi: 10.1109/ACCESS.2017.2757959.
- [13] R. K. Ursem and P. Vadstrup, "Parameter identification of induction motors using differential evolution," *Proc. Congress on Evolutionary Computation (CEC '03)*, Canberra, ACT, Australia, 2003, vol. 2, pp. 790–796. doi: 10.1109/CEC.2003.1299748.
- [14] I. Hafez and R. Dhaouadi, "Parameter Identification of DC Motor Drive Systems using Particle Swarm Optimization," *Proc. Int. Conf. Engineering and Emerging Technologies (ICEET)*, Istanbul, Turkey, 2021, pp. 1–6. doi: 10.1109/ICEET53442.2021.9659664.
- [15] S. Zhou, D. Wang, and Y. Li, "Parameter identification of permanent magnet synchronous motor based on modified-fuzzy particle swarm optimization," *Energy Reports*, vol. 9, pp. 873–879, 2023, doi: 10.1016/j.egy.2022.11.124.
- [16] E. C. Simsek, A. Köse, M. Sahin, and E. Irmak, "Optimization of PID Parameters Using Ant Colony Algorithm for Position Control of DC Motor," *Proc8th International Conference on Renewable Energy Research and Applications (ICRERA)*, Brasov, Romania, 2019, pp. 1017–1021, doi: 10.1109/ICRERA47325.2019.8997108.
- [17] F. W. N. Rahman, E. Setiawan, A. Juniani, and A. T. Nugraha, "Application of Ant Colony Optimization Algorithm in Determining PID Parameters in AC Motor Control," *Brilliance Research of Artificial Intelligence*, vol. 4, no. 2, pp. 538–549, Oct. 2024. doi: 10.47709/brilliance.v4i2.4741.
- [18] M. Tabish, A. Kalam, and A. Zayegh, "Robot DC Servo Motor Parameters Estimation in a Closed Loop Using BAT Optimisation Algorithm," *Proc. Int. Conf. Electrical, Communication, and Computer Engineering (ICECCE)*, Swat, Pakistan, 2019, pp. 1–5. doi: 10.1109/ICECCE47252.2019.8940713.
- [19] O. Rodríguez-Abreo, J. M. Hernandez-Paredes, A. F. Rangel, C. Fuentes-Silva, and F. A. C. Velásquez, "Parameter Identification of Motors by

- Cuckoo Search Using Steady-State Relations," IEEE Access, vol. 9, pp. 72017–72024, 2021. doi: 10.1109/ACCESS.2021.3078578.
- [20] Z. Wu and C. Du, "The Parameter Identification of PMSM Based on Improved Cuckoo Algorithm," Neural Processing Letters, vol. 50, pp. 2701–2715, 2019. doi: 10.1007/s11063-019-10052-6.
- [21] R. B. Sepe and J. H. Lang, "Real-time adaptive control of the permanent-magnet synchronous motor," IEEE Transactions on Industry Applications, vol. 27, no. 4, pp. 706–714, Jul.–Aug. 1991. doi: 10.1109/28.85486.
- [22] A. Rubaai and R. Kotaru, "Online identification and control of a DC motor using learning adaptation of neural networks," IEEE Transactions on Industry Applications, vol. 36, no. 3, pp. 935–942, May–Jun. 2000. doi: 10.1109/28.845075.
- [23] B. Nayak, S. Sahu, and T. R. Choudhury, "Parameter Estimation of DC Motor using Adaptive Transfer Function based on Nelder-Mead Optimisation," Indonesian Journal of Electrical Engineering and Computer Science, vol. 9, no. 3, pp. 696–702, Mar. 2018, doi: 10.11591/ijeecs.v9.i3.pp696-702.
- [24] M. Hadeif, A. Bourouina, and M. R. Mekideche, "Parameter Identification of a DC Motor via Moments Method," Iranian Journal of Electrical and Computer Engineering, vol. 7, no. 2, pp. 159–160, Summer-Fall 2008.
- [25] J. Becedas, G. Mamani, and V. Feliu, "Algebraic parameters identification of DC motors: Methodology and analysis," International Journal of Systems Science, vol. 41, no. 10, pp. 1241–1255, Oct. 2010, doi: 10.1080/00207720903244097.
- [26] R. Takano, K. Takaya, and H. Oyama, "NFPDE: Normalizing Flow-based Parameter Distribution Estimation for Offline Adaptive Domain Randomization," Proc. IEEE/RSJ Int. Conf. on Intelligent Robots and Systems (IROS), Abu Dhabi, United Arab Emirates, 2024, pp. 11804–11811, doi: 10.1109/IROS58592.2024.10801378.
- [27] A. Top, "Optimization-Based Tuning of PI Controller Parameters for DC Motor Speed Control", Hittite Journal of Science & Engineering, vol. 12, no. 2, pp. 81–90, Jun. 2025, doi: 10.17350/HJSE19030000354.
- [28] Abdelhadi, S., Megherbi, A. C., Dendouga, A., & Zitouni, A. (2025). Parameters identification of induction motor with hybrid metaheuristic algorithm: Equilibrium Slime Mould. Journal of Engineering, Science and Applications (JESA), IIETA Vol. 58, No. 4, April, 2025, pp. 763-771, DOI: <https://doi.org/10.18280/jesa.580410>
- [29] Wei, Y., Othman, Z., Daud, K. M., Yin, S., Luo, Q., Zhou, Y. (2022). Equilibrium optimizer and slime mould algorithm with variableneighborhood search for job shop scheduling problem. Mathematics, Vol.10, Issue. 21, <https://doi.org/10.3390/math10214063>.
- [30] S. Mirjalili, S. M. Mirjalili, and A. Lewis, "Grey Wolf Optimizer," Advances in Engineering Software, vol. 69, pp. 46–61, 2014, doi: 10.1016/j.advengsoft.2013.12.007.
- [31] E. Trojovská, M. Dehghani, and P. Trojovský, "Zebra Optimization Algorithm: A New Bio-Inspired Optimization Algorithm for Solving Optimization Problems," IEEE Access, vol. 10, pp. 49445–49473, 2022, doi: 10.1109/ACCESS.2022.3172789.